Outdoor Sectional





Shopping list

- 5 Culpeper 2x4 @ 12'
- 4 Culpeper 2x4 @ 8'
- 2 ¾" self tapping exterior deck screws
- Exterior wood glue

CUT LIST

- 3 2x4 @ 70 ½"
- 10 2x4 @ 25 1/2" (includes back support)
- 1 2x4 @ 12 ½"
- 6 2x4 @ 72"
- 1 2x4 @ 70 ¾" (back support-cut to fit)

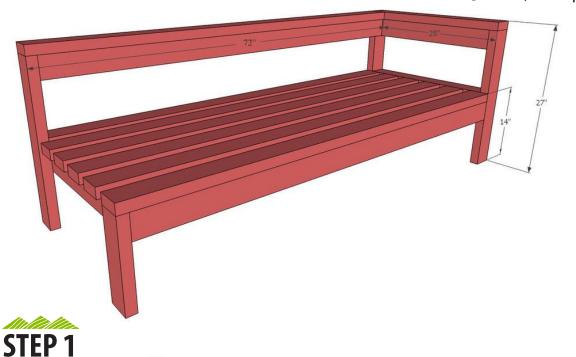

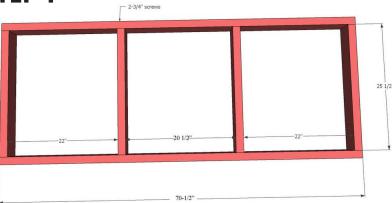



Cut boards using a compound miter saw (preferred) but you can also use a circular saw.

Build the seat frame using the self-tapping screws.




Build arm

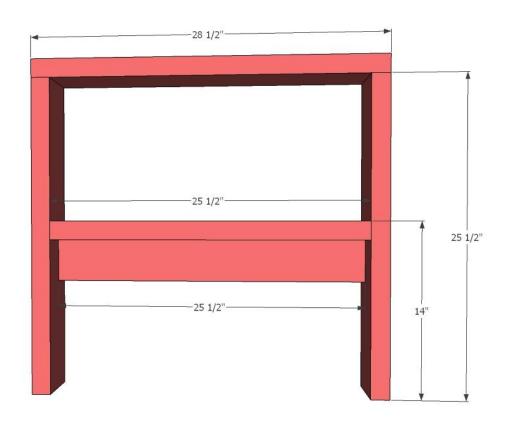


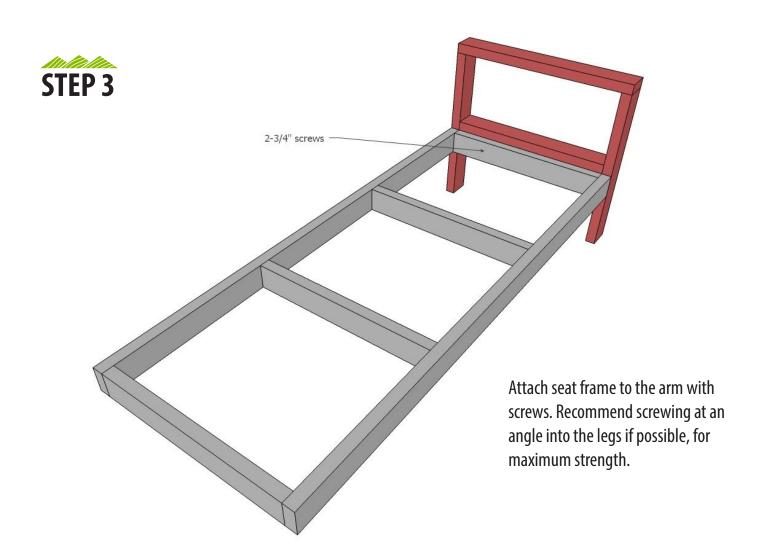




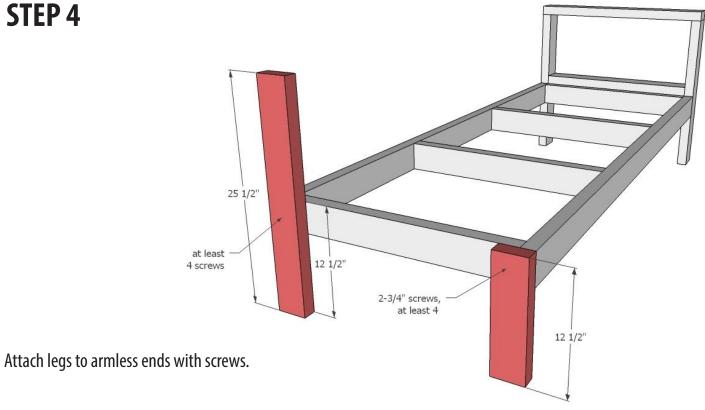



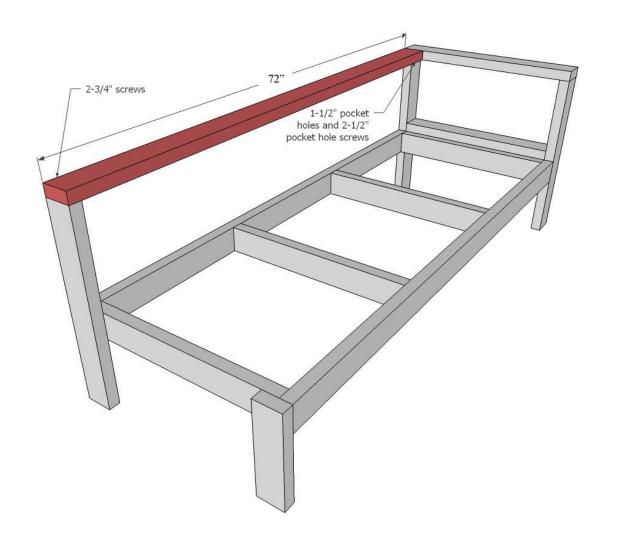

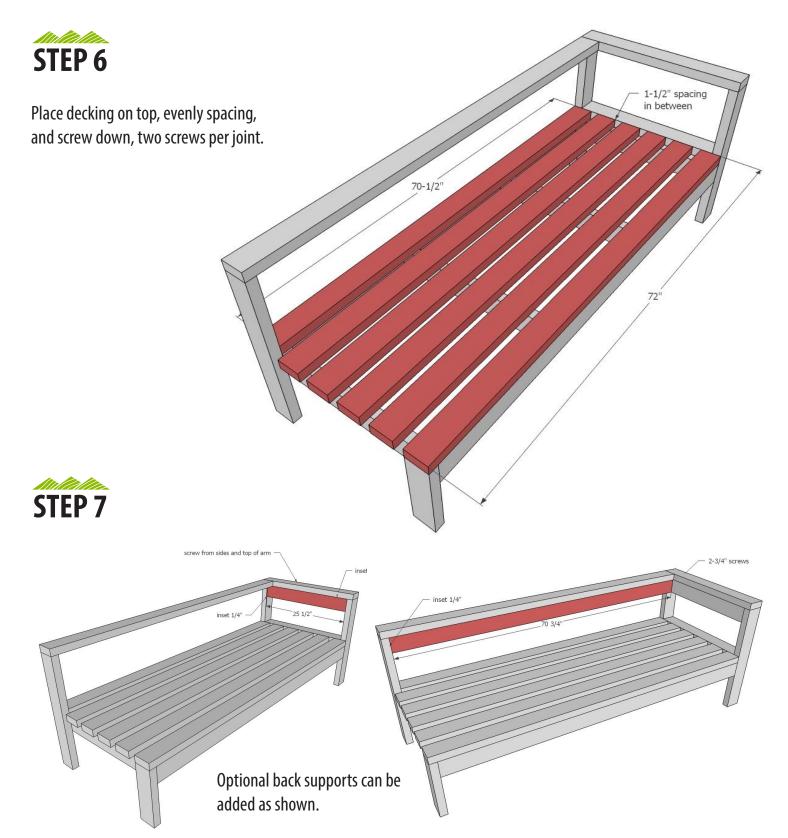

Finishing Instructions

Fill all holes with wood filler and let dry. Apply additional coats of wood filler as needed.

When wood filler is completely dry, sand the project in the direction of the wood grain with 120 grit sandpaper. Vacuum sanded project and work station to remove sanding residue. Wipe project clean with damp cloth.

Finish with paint, stain, polyurethane or other method you prefer.